

HC6-100 规格书 Specifications

电气参数 Ratings:

- ◇ 额定工作电压
Rated Operational Voltage: 1000V
- ◇ 额定工作电流
Rated Current: 75, 85, 100A
- ◇ 额定绝缘电压
Rated Insulation Voltage: 1000V
- ◇ 额定冲击耐受电压
Rated Impulse Voltage: 8kV
- ◇ 额定接通能力
Rated Making Capacity: 10×Ie (AC-3) , 12×Ie (AC-4)
- ◇ 额定分断能力
Rated Breaking Capacity: 8×Ie (AC-3) , 10×Ie (AC-4)
- ◇ 极数
Number of Poles: 3P



认证/标准 Approvals/Standard:

- ◇ UL
- ◇ SEMKO
- ◇ CB
- ◇ CCC/CE

产品特征 Features&Benefits:

- 模块化设计, 产品结构紧凑
Modular design, compact product structure
- 操作性能安全可靠
Safe and reliable operation performance
- 特殊的触点工艺确保连续可靠的传导
The special process of the contacts ensures continuous and reliable conduction
- 安装方便, 无需工具安装附件
Convenient installation without tools to install and remove accessories
- 多种接线端子可供选择, 接下能力范围广
A variety of connection wire terminal options, wide range of wiring capabilities
- 更好的抗冲击性和抗震性能
Better impact resistance and seismic performance
- 防尘性能好, 可选配防尘配件
Dustproof performance, optional dustproof accessories can be added
- 低功耗线圈
Low power consumption coil










产品型号说明 Product Model:

	HC6	-100	/N	220V	50/60Hz
公司代码 Company Code					
额定电流 Rated Current	75=75A 85=85A 100=100A				
特殊功能 Special Function	N: 可逆接触器 Reversing Contactor Nil: 非可逆接触器 Non Reversing Contactor				
控制回路电压 Control Circuit Voltage	24V 36V 42V 48V 110V 120V 127V 208V 220V 230V 240V 277V 380V 400V 415V 440V 480V 500V 600V				
频率 Frequency	50Hz (不包括线圈电压为208/277/408/600V Except that the coil voltage are 208/277/408/600V) 50/60Hz				

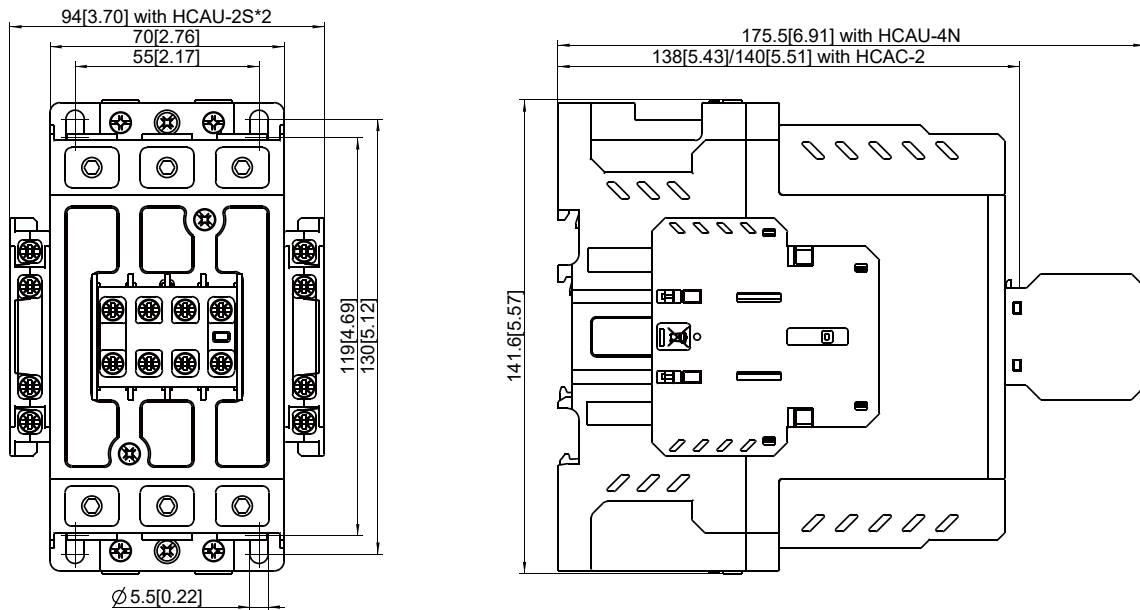
特性参数 CHARACTERISTIC PARAMETERS

产品型号 Product Model			HC6-75	HC6-85	HC6-100
约定自由空气发热电流 Conventional Free Air Thermal Current (Ith)	≤140°F (≤60°C)	A	100	100	125
极数 Poles			3		
额定绝缘电压 Rated Insulation Voltage (Ui)	V		1000		
额定冲击耐受电压 Rated Impulse Voltage (Uimp)	kV		8		
额定接通能力 Rated Making Capacity	接通电流 Marking Current: 10×Ie (AC-3), 12×Ie (AC-4)				
额定分断能力 Rated Breaking Capacity	分断电流 Breaking Current: 8×Ie (AC-3), 10×Ie (AC-4)				
电气寿命 Electrical Durability ×10 ⁴	AC-3	Ops	80		
	AC-4	Ops	见特性曲线图 See the Characteristic Curves		
操作频率 Operation Frequency	AC-3	Ops/h	600		
	AC-4	Ops/h	150		
机械寿命 Mechanical Durability ×10 ⁴	Ops		1000		
操作频率 Operation Frequency	Ops/h		3600		
相匹配的熔断器 Matching Fuse Type			NT00-100	NT00-100	NT00-125
相匹配的热过载继电器 Matching Overload Relay Type			HCR6-100		
自带辅助触头数量 Auxiliary Contact Composition			-		
环境温度 Ambient Temperature			-13~ +140°F (-25~ +60°C)		
安装位置 Installation Position					
外壳防护等级 Protection Degree			IP00		
抗冲击能力 Impact Resistance 1/2正弦波 Sine Wave =11ms	打开 Open	g	10		
	闭合 Close	g	15		
抗震能力 Seismic Performance	打开 Open	g	2		
	闭合 Close	g	4		
重量 Weight	g		1380		
AC-1					
额定工作电流 Rated Operational Current (Ie)	≤104°F (≤40°C)	A	100	100	125
	≤140°F (≤60°C)	A	100	100	125
额定工作功率 Rated Operational Power (Pe)	220/240V	kW	45	45	45
	380/415V	kW	78	78	78
	500V	kW	102	102	102
	660/690V	kW	135	135	135
AC-3					
额定工作电流 Rated Operational Current (Ie)	220/240V	A	75	85	100
	380/415V	A	75	85	100
	500V	A	64	78	78
	660/690V	A	42	42	49
额定工作功率 Rated Operational Power (Pe)	220/240V	kW	22	22	25
	380/415V	kW	37	37	45
	500V	kW	45	45	45
	660/690V	kW	45	45	45
AC-4					
额定工作电流 Rated Operational Current (Ie)	380/415V	A	75	85	100
	660/690V	A	39	42	42
额定工作功率 Rated Operational Power (Pe)	380/415V	kW	32	37	45
	660/690V	kW	37	42	42
AC-4(200000寿命周期的额定功率和额定电流 Rated power and rated current for 200000 life cycles)					
额定工作电流 Rated Operational Current (Ie)	380/415V	A	30	36	36
	660/690V	A	21	27	27
额定工作功率 Rated Operational Power (Pe)	380/415V	kW	15.1	17.9	17.9
	660/690V	kW	18.5	25	25

特性参数 CHARACTERISTIC PARAMETERS

产品型号 Product Model		HC6-75		HC6-85		HC6-100		
UL								
电机额定功率 Rated Power of Motor 50/60Hz	1P	110-120V	HP	5	5	7.5		
		220-240V	HP	15	15	15		
	3P	200-208V	HP	25	25	30		
		220-240V	HP	30	30	30		
		440-480V	HP	50	50	50		
		550-600V	HP	60	60	60		
控制回路特性 Control Circuit Characteristic								
控制回路电压 Control Circuit Voltage			V	50Hz:24/36/42/48/110/120/127/220/230/240/380/400/415/440/500V 50/60Hz:24/36/42/48/110/120/127/208/220/230/240/277/380/400/ 415/440/480/500/600V				
电压范围 Voltage Range		吸合 Pick-up		(75%-120%) Us				
		释放 Drop-out		(20%-65%) Us				
平均能耗 Average Power Consumption 50/60Hz	50Hz	吸合 Pick-up	VA	245				
		保持 Sealing	VA	26				
	60Hz	吸合 Pick-up	VA	245				
		保持 Sealing	VA	26				
平均能耗 Average Power Consumption 50Hz	50Hz	吸合 Pick-up	VA	245				
		保持 Sealing	VA	26				
动作时间 Operating Time	闭合延时 Closing Delay	ms	20-35					
	打开延时 Open Delay	ms	6-20					
热耗散 Current Heat Loss		交流 AC	W	6-10				
接线能力 Connections								
主回路 Main Circuit		1根 Piece	mm ²	10-50	10-50	10-50		
		2根 Pieces	mm ²	6-35	6-35	6-35		
		1根 Piece	mm ²	10-50	10-50	10-50		
		2根 Pieces	mm ²	6-35	6-35	6-35		
		1根 Piece	mm ²	10-50	10-50	10-50		
		2根 Pieces	mm ²	6-35	6-35	6-35		
		φ	mm	6	6	6		
		Max		10	10	10		
		l	mm	-	-	-		
		L	mm	-	-	-		
		φ	mm	6	6	6		
		Max		10	10	10		
	硬线/绞合 Solid/Stranded		AWG	10-0				
	连接螺钉/螺栓 Screw/Bolt		mm	M8(内六角螺栓 Hexagon Socket Bolt)				
扭矩 Tightening Torque		N·m	6					
控制回路 Control Circuit		1根 Piece	mm ²	1-4	1-4	1-4		
		1根 Piece	mm ²	1-4	1-4	1-4		
		1根 Piece	mm ²	1-4	1-4	1-4		
		l	mm	3.6	3.6	3.6		
		L	mm	7.8	7.8	7.8		
	硬线/绞合 Solid/Stranded		AWG	18-14				
连接螺钉/螺栓 Screw/Bolt		mm	M3.5					
扭矩 Tightening Torque		N·m	1.2					

外形及安装尺寸 Outline and Installations mm [inch]:



安装使用及维护 Precautions for Use:

1. 安装前首先检查实际使用场合是否符合接触器的用途与适用范围、技术参数及其正常工作条件和安装条件等。
Before installation, first check whether the actual use situation conforms to the purpose and scope of application, technical parameters, normal working conditions and installation conditions of the contactor.
2. 安装时, 将接触器的止动件向下拉, 把接触器置于安装轨上, 再将止动件向上推使接触器固定在安装轨上, 不得松动、脱落。需要拆卸接触时, 将止动件拉下便可轻松取下。
During installation, pull down the stopper of the contactor, place the contactor on the mounting rail, and then push the stopper upward to fix the contactor on the mounting rail without loosening or falling off. When the contact needs to be removed, the stopper can be easily removed by pulling it down.
3. 接触器接线时应将导线伸入接线孔中, 然后拧紧接线螺钉, 使导线不得松动、拔出。裸露铜线头不能露在接线端外。
When the contactor is connected, the wire shall be inserted into the connection hole, and then the connection screw shall be tightened to prevent the wire from loosening and pulling out. The exposed copper wire head shall not be exposed outside the terminal.
4. 接触器在接线时不得猛拧接线螺钉, 在拧紧和拧松螺钉时所用螺丝刀应适当, 避免使用气动工具打滑螺钉。
When connecting the contactor, it is not allowed to screw the connecting screw violently. When tightening and loosening the screw, the screwdriver shall be appropriate to avoid slipping the screw with pneumatic tools.
5. 检查接线正确无误后, 应在主触头不带电的情况下, 先使线圈通电分合数次, 检查产品动作是否可靠, 然后才能投入使用。
After checking whether the wiring is correct, when the main contact is not charged, the coil shall be powered on and off for several times to check whether the product action is reliable, and then it can be put into use.
6. 当接触器间、接触器与断路器间紧靠安装时, 需安装间隔件以利于散热; 当配电箱内温度超过 $+60^{\circ}\text{C}$ 时, 接触器需要降容使用。
When contactors, contactors and circuit breakers are installed close to each other, spacers shall be installed to facilitate heat dissipation; When the temperature in the distribution box exceeds $+60^{\circ}\text{C}$, the contactor needs to be reduced in capacity.
7. 接触器在使用期中, 应定期检查接线螺钉的松紧情况, 如出现松脱应及时将其拧紧; 定期清除外壳表面的尘埃, 保持外壳良好的绝缘性; 在用中如出现较大的噪音或外壳绝缘失效等情况, 应及时更换新的产品; 按照产品工作频率和使用时间来计算, 当产品的工作次数达到(或接近产品的使用寿命时, 应及时更换新的产品。
During the service life of the contactor, the tightness of the connecting screw shall be checked regularly, and in case of looseness, it shall be tightened in time; Regularly remove the dust on the surface of the shell to maintain good insulation of the shell; In case of large noise or shell insulation failure during use, new products shall be replaced in time; According to the working frequency and service time of the product, when the working frequency of the product reaches (or approaches) the service life of the product, the new product shall be replaced in time.
8. 接触器的保质储存期为自出厂之日(见产品合格证或生产批号)起24个月, 储存温度为 $-25^{\circ}\text{C}\sim+60^{\circ}\text{C}$, 且不得受雨雪侵袭和阳光直射。产品存期的产品必须重新检查。如因储存不当或超过储存期未经检查就使用儿出现质量问题, 按有关质量法规处理。
The shelf life of the contactor is 24 months from the date of delivery (see the product certificate or production batch number). The storage temperature is $-25^{\circ}\text{C}\sim+60^{\circ}\text{C}$, and it shall not be affected by rain and snow and direct sunlight. Products in the storage period must be rechecked. In case of quality problems caused by improper storage or use without inspection beyond the storage period, it shall be handled according to relevant quality regulations.